



AKOUSTI-LINER™

Temperature Limit: 250° F (121° C)

DESCRIPTION

Akousti-Liner insulation is a flexible duct liner providing both thermal and acoustical insulation. It is manufactured from inorganic glass fibers bonded by a thermosetting binder. The airstream surface is faced with a black mat bonded to the black glass mineral wool substrate. Akousti-Liner insulation is offered with or without edge coating to seal fibers.

ECOSE® TECHNOLOGY

ECOSE Technology is a revolutionary binder chemistry that enhances the sustainability of our products. The “binder” is the bond that holds our fiberglass product together and gives the product its shape and brown color. ECOSE Technology is a plant-based, sustainable chemistry that replaces the phenol/formaldehyde (PF) binder traditionally used in fiberglass products. Products using ECOSE Technology are formaldehyde-free and have reduced global warming potential when compared to our products of the past.

SUSTAINABILITY

Manson Insulation’s products used for thermal insulating purposes recover the energy that it took to make them in just hours or days, depending on the application. Once installed, the product continues to save energy and reduce carbon generation as long as it is in place.

Fiberglass insulation with ECOSE Technology contains three key ingredients:

- Recycled glass content, verified annually by UL Environment
- Sand, one of the world’s most abundant resources
- Our green chemistry initiative ECOSE Technology, which is validated to be formaldehyde-free

APPLICATION

Manson Insulation Akousti-Liner insulation is a durable, flexible liner used extensively in flat and irregular shaped ductwork.

INSTALLATION

All duct liner shall be installed in accordance with the requirement of the NAIMA Fibrous Glass Duct Liner Standard or SMACNA HVAC Duct Construction Standard and the project specification. Liner shall be adhered with adhesive (complying with ASTM C916) and mechanical fasteners.

LIMITATION

Duct liner should be kept clean and dry during shipping, storage, installation and system operation. When condensation is permitted to occur between nested liner and galvanized steel panels, discoloration of the metal may occur.

PRODUCT FEATURES

- Does not contain polybrominated diphenyl ethers (PBDE) such as Penta – BDE, Octa – BDE or Deca – BDE
- Airstream surface mat facing is treated with an EPA-registered anti-microbial agent to aid in the prevention of fungal and bacterial growth

UL Environment

- GREENGUARD certified
- GREENGUARD Gold certified
- Validated to be formaldehyde-free

EUCEB

- Tested and certified to meet EUCEB requirements

SPECIFICATION COMPLIANCE

- ASTM C1071; Type I
- NFPA 90A and NFPA 90B
- City of New York MEA 323-83-M
- California Title 24
- CAN/CGSB 51.11-92
- ASHRAE 62

FIBERGLASS AND MOLD

Fiberglass insulation will not sustain mold growth. However, mold can grow on almost any material when it becomes wet and contaminated. Carefully inspect any insulation that has been exposed to water. If it shows any sign of mold, it must be discarded. If the material is wet but shows no evidence of mold, it should be dried rapidly and thoroughly. If it shows signs of facing degradation from wetting, it should be replaced. Air handling insulation used in the air stream must be discarded if exposed to water.


NOTES

The chemical and physical properties of Manson Insulation Akousti-Liner insulation represent average values determined in accordance with accepted test methods. The data is subject to normal manufacturing and testing variations. The data is supplied as a technical service and is subject to change without notice. References to numerical flame spread ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

Check with your Manson Insulation Area Manager to ensure information is current.

MECHANICAL FASTENER LOCATION

VELOCITY/FT./MIN. (M/SEC.)	0-255 (0-12.7)	2501-5000 (12.7-25.4)
A. From corners of duct	4" (102 mm)	4" (102 mm)
B. From transverse of duct	3" (76 mm)	3" (76 mm)
C. Across width of duct, on centers (min. 1/side)	12" (305 mm)	6" (152 mm)
D. Across length of duct, on centers (min. 1/side)	18" (457 mm)	16" (406 mm)

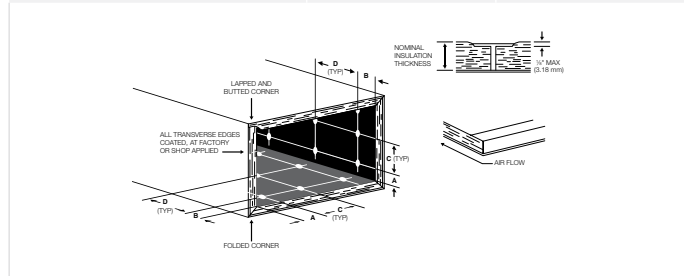

TECHNICAL DATA

PROPERTY (UNIT)	TEST	PERFORMANCE
Corrosiveness	ASTM C665	Does not accelerate corrosion of steel
Maximum Service Temperature	ASTM C411	250° F (121° C)
Air Velocity	ASTM C1071; Type I	Max. 6,000 ft./min. (30.5 m/sec.) Tested to 15,000 ft./min. (76.2 m/sec.)
Water Vapor Sorption (by weight)	ASTM C1104	Less than 3%
Microbial Growth	ASTM C1338, ASTM G21, ASTM G22	Pass
Surface Burning Characteristics (flame spread/smoke developed)	ASTM E84, UL 723, CAN/ULC S102	UL/ULC Classified FHC 25/50

ACOUSTICAL PERFORMANCE | ASTM C423, TYPE A MOUNTING

DENSITY	THICKNESS	FREQUENCY						
		125	250	500	1000	2000	4000	NRC
1.5 PCF (24 kg/m³)	1" (25 mm)	0.18	0.28	0.73	0.85	0.91	0.90	0.70
	1½" (38 mm)	0.23	0.50	0.87	0.92	0.93	0.93	0.80
	2" (51 mm)	0.37	0.76	1.02	1.00	0.98	0.92	0.95
2.0 PCF (32 kg/m³)	½" (13 mm)	0.10	0.17	0.43	0.59	0.73	0.75	0.50
	1" (25 mm)	0.25	0.35	0.69	0.89	0.96	1.01	0.70

NOTE: ASHRAE Handbook for HVAC Applications – Sound and Vibration Control contains insertion loss values for lined sheet metal ducts.


THERMAL PERFORMANCE | ASTM C177 MEAN TEMPERATURE 75° F (24° C)

DENSITY	THICKNESS	C-VALUE ¹		R-VALUE ²	
		BTU/ FT² · HR · °F	W/ M² · °C	FT² · HR · °F/ BTU	M² · °C/ W
1.5 PCF (24 kg/m³)	1" (25 mm)	0.24	1.42	4.2	0.74
	1½" (38 mm)	0.17	0.97	6.0	1.06
	2" (51 mm)	0.13	0.74	8.0	1.41
2.0 PCF (32 kg/m³)	½" (13 mm)	0.48	2.73	2.1	0.37
	1" (25 mm)	0.24	1.36	4.2	0.74

¹The lower the value, the better the performance.

²The higher the value, the better the performance.

FRICITION LOSS (INCHES OF WATER PER 100')

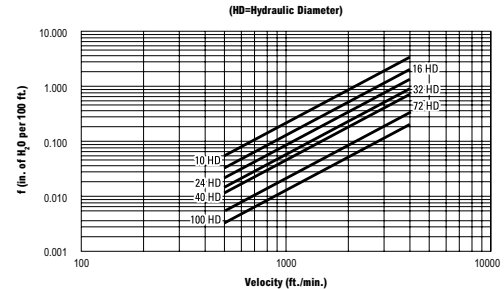

FT./MIN. VELOCITY	HYDRAULIC DIAMETER						
	10"	16"	24"	32"	40"	72"	100"
500	0.054	0.030	0.018	0.012	0.009	0.005	0.003
600	0.077	0.042	0.025	0.018	0.013	0.007	0.004
700	0.104	0.057	0.034	0.024	0.018	0.009	0.006
800	0.134	0.074	0.044	0.031	0.023	0.011	0.008
900	0.169	0.093	0.056	0.039	0.029	0.014	0.010
1000	0.207	0.114	0.068	0.048	0.036	0.018	0.012
2000	0.806	0.443	0.266	0.186	0.141	0.069	0.046
3000	1.797	0.988	0.594	0.415	0.315	0.153	0.103
4000	3.179	1.748	1.050	0.734	0.557	0.271	0.181
5000	4.952	2.724	1.636	1.143	0.867	0.422	0.283

Manson Insulation | www.imanson.com

One Knauf Drive, Shelbyville, IN 46176

Sales (317) 398-4434, ext. 8485

Technical Support (317) 398-4434, ext. 8727

M-CI-DLE-DS | 05-18

